


24 鉄筋コンクリートロングU

形状・寸法及び配筋

道路用製品

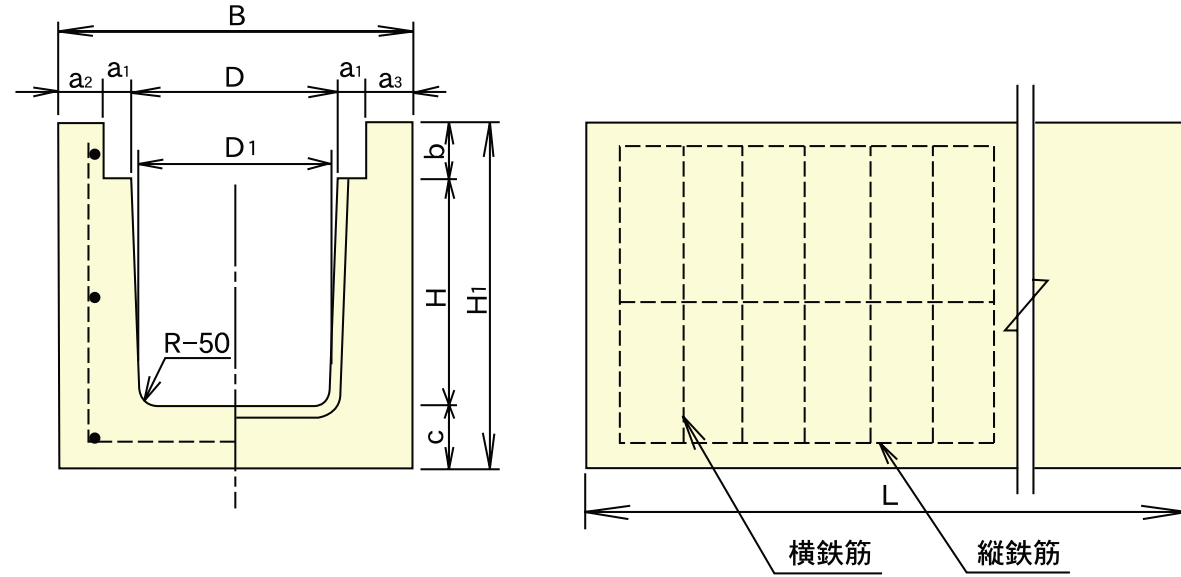

単位 mm

種類	呼び名	寸法											鉄筋				重量 (kg)	コード
		L	B	D	D ₁	H	H ₁	a ₁	a ₂	a ₃	b	c	横鉄筋		縦鉄筋			
													径	本	径	本		
歩車道兼用型 (H型) 1200×1200	H4-24A	4000	480	240	230	240	440	50	70	70	100	100	5	16	5	7	1130	00821
	H4-24B	4000	480	240	230	300	500	50	70	70	100	100	5	16	5	7	1280	00825
	H4-24C	4000	480	240	230	360	560	50	70	70	100	100	5	16	5	7	1420	00829
	H4-24CA	4000	480	240	230	400	600	50	70	70	100	100	5	16	5	7	1520	00833
	H4-24D	4000	480	240	230	500	700	50	70	70	100	100	6	20	5	7	1750	00837
	H4-24E	4000	480	240	230	600	800	50	70	70	100	100	6	28	5	9	1980	00841
	H4-30	4000	540	300	290	300	500	50	70	70	100	100	5	16	5	7	1350	00845
	H4-35	4000	540	300	290	350	550	50	70	70	100	100	5	16	5	7	1460	00849
	H4-40	4000	540	300	290	400	600	50	70	70	100	100	5	16	5	7	1580	00853
	H4-45	4000	540	300	290	450	650	50	70	70	100	100	5	16	5	7	1690	00857
	H2-50	2000	540	300	290	500	700	50	70	70	100	100	5	8	5	7	900	00861
	H2-60	2000	540	300	290	600	800	50	70	70	100	100	5	8	5	7	1020	00863
	H2-70	2000	540	300	290	700	950	50	70	70	100	150	6	12	5	12	1260	00865
	H2-80	2000	540	300	290	800	1050	50	70	70	100	150	6	14	5	12	1380	00867
H2-90	2000	540	300	290	900	1150	50	70	70	100	150	D10	8	D10	10	1490	00869	
車道用型 (C型) 1200×1500	C4-30	4000	570	300	290	300	500	50	70	100	100	100	5	16	5	7	1490	00881
	C4-35	4000	570	300	290	350	550	50	70	100	100	100	5	16	5	7	1620	00885
	C4-40	4000	570	300	290	400	600	50	70	100	100	100	5	24	5	7	1750	00889
	C4-45	4000	570	300	290	450	650	50	70	100	100	100	5	24	5	7	1880	00893
	C2-50	2000	570	300	290	500	700	50	70	100	100	100	6	10	5	7	1000	00897
	C2-55	2000	570	300	290	550	750	50	70	100	100	100	6	10	5	7	1070	00899
	C2-60	2000	570	300	290	600	800	50	70	100	100	100	6	16	6	7	1130	00901
	C2-70	2000	570	300	290	700	950	50	70	100	100	150	D10	8	6	12	1400	00903
	C2-80	2000	570	300	290	800	1050	50	70	100	100	150	D10	10	6	12	1530	00905
	C2-90	2000	570	300	290	900	1150	50	70	100	100	150	D10	14	D10	12	1660	00907
横断用型 (D型) 1500×1500	D4-30	4000	600	300	290	300	500	50	100	100	100	100	5	16	5	7	1630	00911
	D2-35	2000	600	300	290	350	550	50	100	100	100	100	5	8	5	7	890	00915
	D2-40	2000	600	300	290	400	600	50	100	100	100	100	5	12	5	7	960	00917
	D2-45	2000	600	300	290	450	650	50	100	100	100	100	5	12	5	7	1030	00919
	D2-50	2000	600	300	290	500	700	50	100	100	100	100	6	10	5	7	1100	00921
	D2-55	2000	600	300	290	550	750	50	100	100	100	100	6	10	5	7	1180	00923
	D2-60	2000	600	300	290	600	800	50	100	100	100	100	6	14	6	7	1250	00925
	D2-70	2000	600	300	290	700	950	50	100	100	100	150	D10	8	6	12	1530	00927
	D2-80	2000	600	300	290	800	1050	50	100	100	100	150	D10	10	6	12	1680	00929
	D2-90	2000	600	300	290	900	1150	50	100	100	100	150	D10	14	D10	12	1820	00931
歩道用型 (F型) 1200×1200	F4-30	4000	540	300	290	300	450	50	70	70	50	100	5	16	5	7	1280	00941
	F4-35	4000	540	300	290	350	500	50	70	70	50	100	5	16	5	7	1400	00945
	F4-40	4000	540	300	290	400	550	50	70	70	50	100	5	16	5	7	1510	00949
	F4-45	4000	540	300	290	450	600	50	70	70	50	100	5	16	5	7	1630	00953
	F4-50	4000	540	300	290	500	650	50	70	70	50	100	5	16	5	7	1740	00957
	F2-55	2000	540	300	290	550	700	50	70	70	50	100	5	8	5	7	930	00961
	F2-60	2000	540	300	290	600	750	50	70	70	50	100	5	8	5	7	990	00963
	F2-65	2000	540	300	290	650	800	50	70	70	50	100	5	8	5	7	1050	00965
	F2-75	2000	540	300	290	750	950	50	70	70	50	150	6	12	5	12	1290	00967
	F2-85	2000	540	300	290	850	1050	50	70	70	50	150	6	14	5	12	1400	00969
	F2-95	2000	540	300	290	950	1150	50	70	70	50	150	D10	8	D10	12	1520	00971