



千葉県型側溝

千葉県型側溝 CH..... P45

千葉県型側溝用蓋 P46

千葉県型側溝 CH

形状・寸法及び配筋

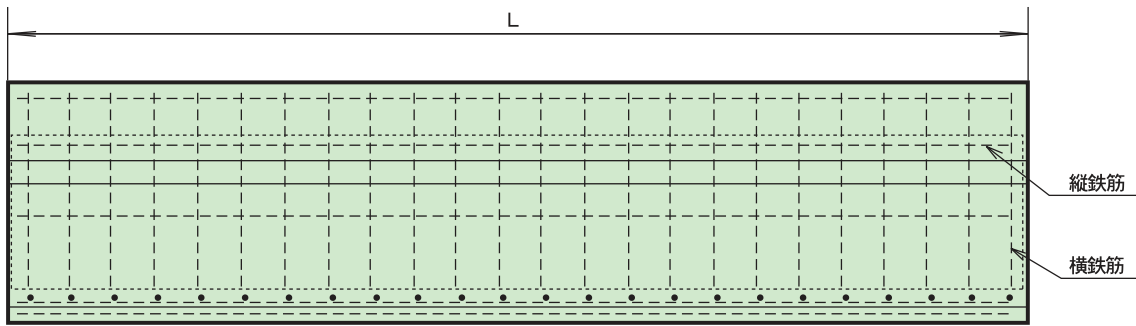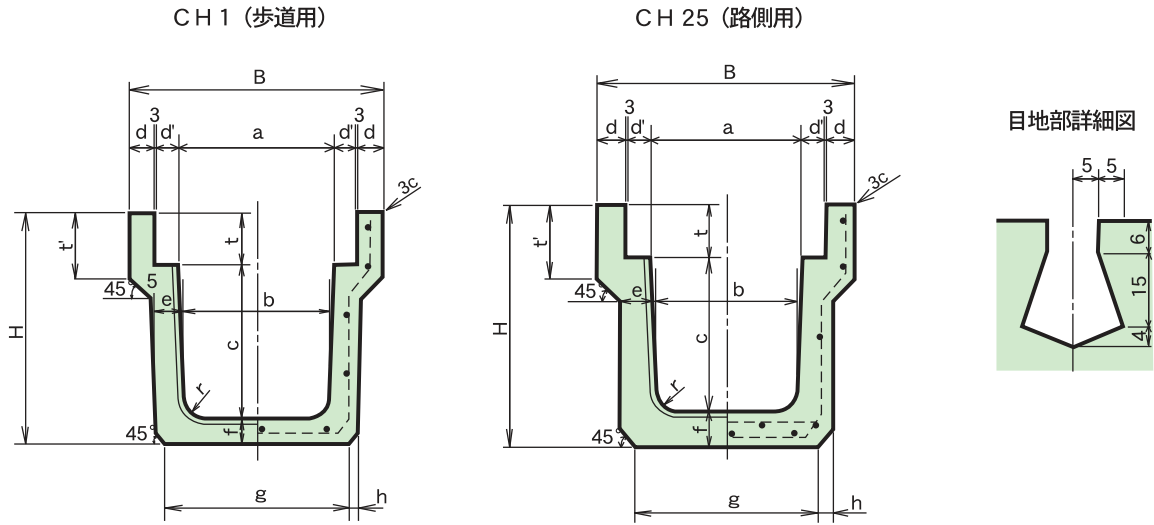


単位 mm

種類	呼び名	寸 法														配 筋				参考重量 (kg)	コード					
		a	b	c	d	d'	e	f	g	h	t	t'	r	B	H	L	横鉄筋		縦鉄筋							
																	外側鉄筋	底版内側鉄筋	外側鉄筋			底版内側鉄筋				
																	径	本	径			本				
歩道用	CH1-30-30	300	280	300	45	47	60	60	360	20	100	125	50	490	460	2000	4	10	—	—	4	11	—	—	342	00701
	CH1-30-40	300	270	400	45	47	65	65	360	20	100	125	50	490	565	2000	4	10	—	—	4	13	—	—	414	00703
	CH1-30-50	300	260	500	45	47	70	70	360	20	100	125	50	490	670	2000	5	10	—	—	4	15	—	—	491	00705
	CH1-30-60	300	250	600	45	47	75	75	360	20	100	125	50	490	775	2000	6	10	—	—	4	15	—	—	572	00707
	CH1-40-40	400	370	400	45	47	65	65	460	20	100	125	50	590	565	2000	5	10	—	—	4	14	—	—	445	00711
	CH1-40-50	400	360	500	45	47	70	70	460	20	100	125	50	590	670	2000	5	10	—	—	4	16	—	—	524	00713
	CH1-40-60	400	350	600	45	47	75	75	460	20	100	125	50	590	775	2000	6	10	—	—	4	16	—	—	608	00715
路側用	25-24-24	240	220	240	60	47	57.5	60	335	—	100	120	50	460	400	2000	5	14	—	—	4	11	—	—	295	00721
	25-24-30	240	220	300	60	47	57.5	60	335	—	100	120	50	460	460	2000	5	18	—	—	4	13	—	—	365	00723
	CH25-30-30	300	280	300	55	47	70	70	360	30	100	145	50	510	470	2000	5	24	5	24	4	11	4	2	413	00731
	CH25-30-40	300	270	400	55	47	75	75	340	40	100	145	50	510	575	2000	D6	19	D6	10	4	13	4	2	491	00733
	CH25-30-50	300	260	500	55	47	80	80	340	40	100	145	50	510	680	2000	D6	21	D6	11	4	15	4	2	578	00735
	CH25-30-60	300	250	600	55	47	85	85	340	40	100	145	50	510	785	2000	D6	25	D6	13	5	13	5	2	670	00737
	CH25-40-40	400	370	400	60	47	70	70	430	40	100	140	50	620	570	2000	D6	23	D6	12	4	14	4	3	504	00741
	CH25-40-50	400	360	500	60	47	80	80	440	40	100	140	50	620	680	2000	D6	23	D6	12	4	16	4	3	623	00743
	CH25-40-60	400	350	600	60	47	85	85	440	40	100	140	50	620	785	2000	D6	25	D6	13	5	13	5	3	717	00745


千葉県型側溝用蓋

形状・寸法及び配筋


CHL 1-30 (歩道用)
CHL 1-40 (歩道用)

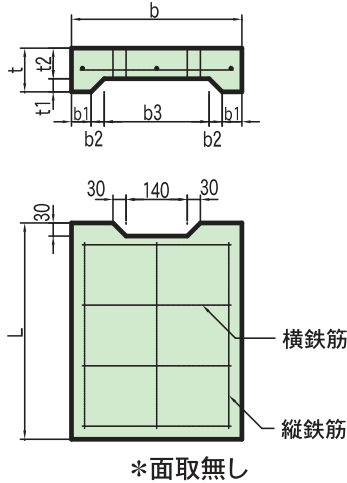


25-24 (路側用T-25)

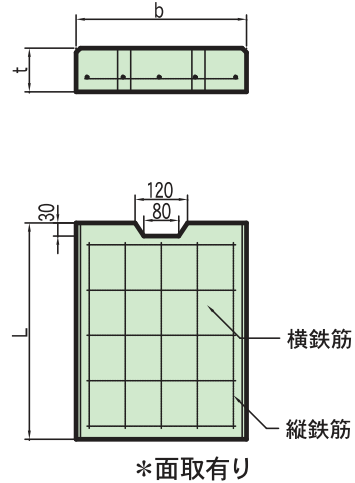

CHL 25-30 (路側用T-25)

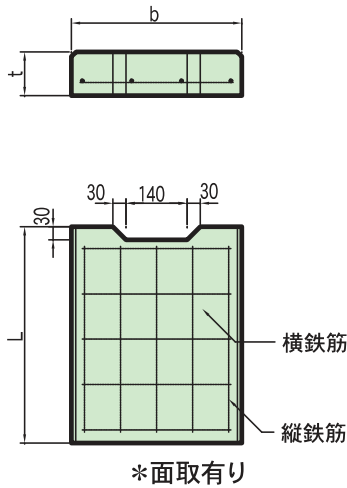

CHL 25-40 (路側用T-25)

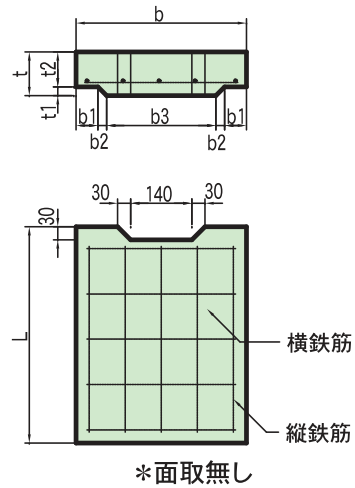

種類	呼び名	寸法								配筋				参考重量 (kg)	コード
		b	b1	b2	b3	t	t1	t2	L	横鉄筋		縦鉄筋			
										径	数量	径	数量		
歩道用	CHL 1-30	390	45	30	240	100	30	70	495	D 6	4	D 6	3	37	00791
	CHL 1-40	490	45	30	340	100	30	70	495	D 6	4	D 6	3	46	00792
路側用	25-24	330	—	—	—	100	—	—	495	D10	5	D 6	5	40	00793
	CHL25-30	390	—	—	—	100	—	—	495	D10	4	D 6	4	46	00794
	CHL25-40	490	50	20	350	120	20	100	495	D10	5	D 6	5	67	00795

単位 mm